

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : D21F 1/00, 7/08		A1	(11) International Publication Number: <b>WO 98/01618</b>
			(43) International Publication Date: 15 January 1998 (15.01.98)
(21) International Application Number: PCT/GB97/01225			(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 6 May 1997 (06.05.97)			
(30) Priority Data: 08/676,744 8 July 1996 (08.07.96) US			
(71) Applicant: SCAPA GROUP PLC [GB/GB]; Oakfield House, 93 Preston New Road, Blackburn, Lancashire BB2 6AY (GB).			
(72) Inventor: CROOK, Robert, L.; 4614 Pinchurst Road, Wilson, NC 27896 (US).			
(74) Agents: GOODWIN, Mark et al.; Wilson Gunn M'Caw, 41-51 Royal Exchange, Cross Street, Manchester M2 7BD (GB).			Published With international search report.

(54) Title: TISSUE MEMBRANE FELT

(57) Abstract

A membrane felt for use in a Yankee machine, comprising a polymeric matrix membrane layer (11) and a supporting base structure (12). These are secured together, preferably via a batt fibre layer which may be needled between the supporting base structure and membrane layer.

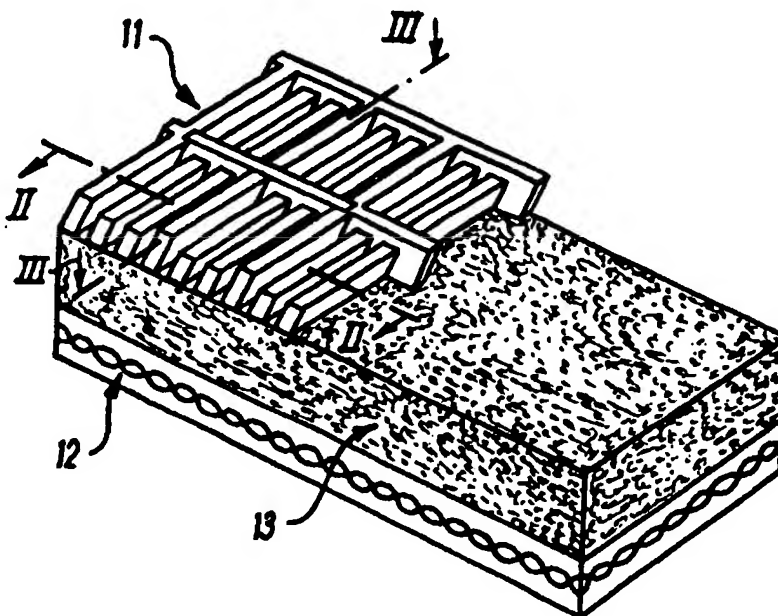

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

- 1 -

**TISSUE MEMBRANE FELT**

The invention relates to a tissue membrane felt, and has particular, though by no means exclusive, reference to a tissue membrane felt to be used as a pick-up felt in a Yankee cylinder drying process.

5           A Yankee machine forms, presses and dries thin paper webs and consists of a forming section, a web pick-up arrangement which transfers the formed web to a press felt, known as a pick-up felt, and one or more press rolls, over which the felt with the web is turned so that the web is pressed directly against a heated Yankee cylinder.

10           Conventionally, a Yankee machine utilises a woven base pick-up felt in order to pick up a formed web from a forming section and transfer the formed web from the forming section to a heated Yankee cylinder for drying and creping. Due to the critical limits at high machine speeds of a Yankee machine, which can reach speeds of about 2000m/min when the web grammage is about 17g/m<sup>2</sup>, the characteristics and quality of the pick-up felt are significant. Traditionally, the pick-up felt has a smooth surface. It must have the requisite  
15           density and water content in order to function properly. The pick-up function is affected by the water quantity, permeability and surface characteristics of the felt. Large quantities of water in the felt may improve its pick-up function, but this creates problems at the drying cylinder.

20           The primary object of this invention is to provide an alternative pick-up felt which has enhanced performance over previous pick-up felts, particularly in the areas of enhanced bulk and softness of the paper web.

- 2 -

It is a further object to provide a pick-up felt having uniquely resilient and compressible reinforcing elements disposed in the matrix of the felt with resistance to abrasive, chemical or heat degradation.

According to the present invention there is proposed a membrane felt for use in a Yankee machine, the membrane felt comprising a supporting base structure and a non-woven membrane, wherein the non-woven membrane comprises a polymeric matrix and yarns extending in the intended running direction thereof.

The yarns may be monofilament or multifilament yarns.

The supporting base structure may be a woven basecloth. Alternatively it may be a composite membrane structure comprising a polymeric matrix and load bearing yarns therein.

In a preferred embodiment of the invention a batt fibre layer is secured, preferably needled, between the supporting base structure and the non-woven membrane layer onto the supporting base structure thus forming a base structure-batt fibre-membrane assembly.

Preferably the batt fibre layer is manufactured from polyamide or polyolefin. The non-woven membrane may be secured to the top of the uppermost staple fibre layer.

Additionally, one or more layers of staple fibre may be needled onto the membrane-fibre-basecloth assembly at the paper contacting side of the felt, namely the membrane surface, whilst ensuring that the amount of staple fibre used in this regard is kept to a minimum so as not to mask the mesh pattern of the membrane.

Batt staple fibre may be needled into the base structure and membrane from the surface of the base structure which is opposite to the membrane side of the felt.

The staple fibre used in the present invention may be between 3 - 15 denier,

- 3 -

preferably 3 - 6 denier, in order to provide the required strength to keep the woven basecloth and non-woven membrane intact when being used at performance critical limits and high machine speeds.

5 The non woven membrane may be of mesh form wherein the mesh layer includes yarns in the intended running direction thereof.

The membrane surface in contact with the web may be planar. However, preferably, it has a ribbed profile, so that at least some of the cross machine direction lands of the mesh membrane are raised with respect to the main plane of the mesh membrane. As an alternative or in addition to the raised cross machine direction lands of the mesh membrane, some of the machine direction lands may be raised with respect to the main plane of the mesh membrane forming a ribbed profile. The machine direction lands are raised by needling the membrane into the base structure so that the yarn containing machine direction lands are retained on the web-contacting surface of the felt whilst those machine direction lands with no yarns are displaced in the body of the felt.

15 In a further preferred embodiment of the invention the membrane surface in contact with the web may have a rectangular pattern. In such a construction some of the machine direction lands are raised above the main surface plane of the membrane, whilst others are depressed with respect to the plane. The raised machine direction lands contain multifilament or monofilament core yarns, and are raised as in the method described above. Thus, the raised machine direction lands, in combination with the transverse ribs in the cross machine direction, as mentioned above, create a rectangular mesh pattern on the surface of the membrane. This is illustrated in the drawings.

20

- 4 -

Preferably, two in every four of the running machine direction mesh lands are depressed with respect to the web-contacting surface of the felt, the remaining two running mesh lands containing yarns are raised with respect to the web-contacting surface of the felt, as described above. The yarn-containing pattern, together with the raised transverse cross machine lands which are preferably spaced apart at 2.5 mm intervals create a square or approximately rectangular mesh pattern on the surface of the membrane. This network of cells allow regions of bulked and unbulk paper fibres of the web to be formed.

The advantages of this arrangement are that the high surface contact area presented by the membrane improves adhesion of the web to the Yankee cylinder. Furthermore, the yarn-containing machine direction lands are slightly rigid in relation to the main surface plane of the membrane due to their relative inflexibility. The cross machine direction lands are also slightly rigid due to the fact that more membrane polymer is present, making them less flexible than the machine direction lands containing no yarns. This results in enhanced creping of the web which leads to an increase in web bulk and softness. The bulk is further improved by the differential specific pressure at the membrane ribs which are under high load when compared with the non-ribbed surface regions which are under much reduced load.

The supporting base structure may comprise a membrane structure of mesh form wherein the mesh layer includes yarns in one direction thereof. The membrane structure may be manufactured in accordance with the method described in GB 2202873-A. The edges of the membrane may be joined in accordance with the method described in GB 2254287.

The matrix material to be used in the present invention may be selected from a wide variety of polymeric materials. A preferred material is thermoplastic polyurethane in terms

- 5 -

of resilience and compressibility. The compressible nature of such an elastomeric membrane material means that creping of the web is enhanced, thus contributing to the desired increase in web bulk and softness. Another advantage of the membrane when its surface is ribbed or rectangular is that it confers grid-like or ribbed symmetrical patterns into the web, thus creating an aesthetically pleasing product.

In a further preferred embodiment of the invention the membrane felt comprises a supporting base structure comprising a composite membrane structure, a second layer of up to 450 g/m<sup>2</sup> of needled batt fibre (6 - 15 denier), a third layer comprising a ribbed membrane on the web contacting side of the felt and an extra 50 - 150 g/m<sup>2</sup> fine surface batt fibre (3 - 6 denier) needled onto the base structure-batt fibre-membrane assembly.

The invention will now be described further, by way of example only, with reference to the accompanying drawings in which:-

Fig. 1 is a diagrammatic perspective view of a cut away portion of membrane felt in accordance with the invention.

Figs. 2 and 3 are enlarged sections taken on lines II-II and III-III respectively of Fig. 1.

Fig. 4 is a plan view of the membrane layer of a membrane felt as illustrated in Fig. 1.

Referring now to the drawings, and particularly to Fig. 1 thereof, a membrane felt which may be used in a Yankee machine comprises a membrane layer 11 and a woven basecloth 12 secured together with batt staple fibre 13.

As illustrated in Figs 1, 2 and 3, membrane layer 11 presents longitudinally extending

- 6 -

raised land areas 14 and transversely extending raised land areas 15 to give rectangular areas 16. Land areas 14 contain load bearing yarns 17 in the intended running direction of the membrane felt.

5 The differential specific pressure at land areas 14 and 15, which are under high load when the membrane felt is in use in a Yankee machine, is much higher than the pressure at rectangular areas 16 which are under reduced load. Consequently there is enhanced creping of the web which leads to an increase in web bulk and softness as well as less fibre compression in the low pressure areas.

10 The fibrous batt layer 13 is secured on one side thereof to the membrane layer 11. The other side of the fibrous batt layer 13 is secured to a woven basecloth by thermal bonding, by an adhesive, ultrasonic welding by needling or any conventional or other method. Ordinarily the fibres in the batt will be randomly oriented, but in some circumstances length orientation may be preferred.

15 Whilst in the embodiment under consideration, land areas 14 and 15 give rectangular areas 16 thus creating a square pressure pattern on the web-contacting membrane surface, this is not essential and the membrane may have a planar surface. Furthermore, the membrane may be ribbed in one direction only, for instance, the lands 14 containing the yarns 17 may be raised above the main surface plane whilst those containing no such reinforcing members are depressed with respect to the plane, with no raised transverse ribs, but instead  
20 depressed transverse ribs with respect to the main plane of the mesh membrane.

The membrane layer of the embodiment in consideration may be conveniently manufactured in accordance with the method described in GB-A-2202873, although other



- 7 -

methods may be preferred, such as, for example, a powder dispersal technique.

The woven basecloth may be of conventional form and materials, capable of providing stability and water handling to the pick-up felt.

5 The batt may be secured to the woven basecloth, alternatively, the batt may be built up in situ on the woven basecloth by means of a melt-blown technique wherein fibres are extruded onto the woven basecloth and, by virtue of their semi-molten state, adhere at their boundary surfaces to the basecloth. The degree of fineness of the fibres may be varied during batt build-up according to the specific requirements of the pick-up felt. It is to be appreciated that spun laced, spun bonded or other non-woven web creating techniques may  
10 also be used to create the batt.

It is to be appreciated that the thickness of the membrane, woven basecloth and batt staple fibre layer, if such a layer is used for securing the membrane/basecloth assembly, may be modified to accommodate the requirements of the web being formed, dried and creped in the Yankee machine.

15 It is to be understood that the above described embodiment is by way of illustration only. Many modifications and variations are possible.

- 8 -

CLAIMS

1. Use of a membrane felt in a Yankee machine, the membrane felt comprising a supporting base structure and a non-woven membrane, wherein the non-woven membrane comprises a polymeric matrix and yarns extending in the intended running direction thereof.

5 2. Use of a membrane felt in accordance with claim 1, wherein the yarns are monofilament or multifilament yarns.

3. Use of a membrane felt in accordance with claim 1, wherein the supporting base structure is a woven basecloth.

10 4. Use of a membrane felt in accordance with claim 1, wherein the supporting base structure is a composite membrane structure comprising a polymeric matrix and load bearing yarns therein.

5. Use of a membrane felt in accordance with claim 1, wherein a batt fibre layer is secured between the supporting base structure and the non-woven membrane layer.

15 6. Use of a membrane felt in accordance with claim 1, wherein a batt fibre layer is secured between the supporting base structure and the non-woven membrane layer and wherein the batt fibre layer is manufactured from polyamide or polyolefin.

7. Use of a membrane felt in accordance with claim 1, wherein a batt fibre layer is secured between the supporting base structure and the non-woven membrane layer and wherein the non-woven membrane is secured to the top of the uppermost batt fibre layer.

20 8. Use of a membrane felt in accordance with claim 1, wherein a batt fibre layer is secured between the supporting base structure and the non-woven membrane layer and wherein one or more additional layers of staple fibre are secured at the membrane surface.

- 9 -


9. Use of a membrane felt in accordance with claim 1, wherein a batt fibre layer is secured between the supporting base structure and the non-woven membrane layer and wherein the batt staple fibre is needled into the membrane felt from the surface of the base structure which is opposite to the membrane side of the felt.

5 10. Use of a membrane felt in accordance with claim 1, wherein a batt fibre layer is secured between the supporting base structure and the non-woven membrane layer and wherein the staple fibre is between 3 to 15 denier, preferably 3 to 6 denier.


10 11. Use of a membrane felt in accordance with claim 1, wherein the polymeric matrix of the membrane has a ribbed profile and wherein at least some of the cross machine direction lands of the membrane are raised with respect to the main plane of the membrane.

12. Use of a membrane felt in accordance with claim 1, wherein the polymeric matrix of the membrane has a rectangular pattern and wherein some of the machine direction lands are raised above the main surface plane of the membrane in combination with raised transverse ribs in the cross machine direction.


15 13. Use of a membrane felt in a Yankee machine, the membrane felt comprising a composite membrane supporting base structure, a base fibre layer up to 450g/m<sup>2</sup> wherein the batt fibre is 6 to 15 denier, a non-woven membrane comprising a polymeric matrix and yarns extending in the running direction thereof and a fine surface batt fibre layer up to 150g/m<sup>2</sup> needled onto the non-woven membrane surface wherein the fine surface batt fibre is 3 to 6  
20 denier.

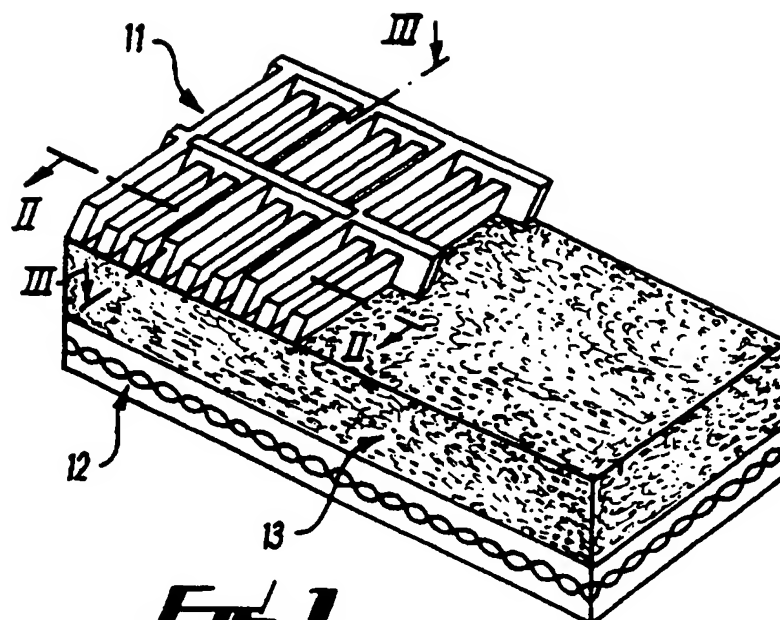


**Fig. 1**

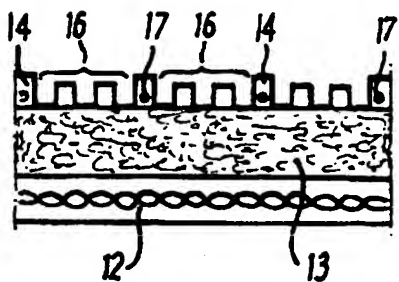

**Fig. 2**

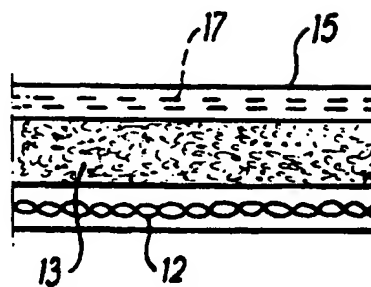

**Fig. 3**



**Fig. 4**

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 97/01225

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 6 D21F1/00 D21F7/08		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC 6 D21F		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 92 17643 A (SCAPA GROUP PLC) 15 October 1992	1,2,4
Y	see the whole document ---	3,5-8
Y	EP 0 037 387 A (NORDISKAFILT AB) 7 October 1981 see the whole document ---	3,5-8
A	US 4 427 734 A (JOHNSON) 24 January 1984 see the whole document ---	1,3,5-8
A	DE 94 16 520 U (WÜRTTEMBERGISCHE FILZTUCHFABRIK D. GESCHMAY) 15 February 1996 see the whole document ---	1,3,5-8
-/--		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <span style="margin-left: 100px;"><input checked="" type="checkbox"/> Patent family members are listed in annex.</span>		
* Special categories of cited documents : <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&amp;" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search	Date of mailing of the international search report	
5 September 1997	17.09.97	
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax (+31-70) 340-3016	Authorized officer  De Rijck, F	

# INTERNATIONAL SEARCH REPORT

Intern. al Application No  
PCT/GB 97/01225

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 3 772 746 A (IVANOWICZ) 20 November 1973 see the whole document -----</p>	<p>1,3,5-7, 9</p>

Form PCT/ISA/218 (continuation of second sheet) (July 1992)

# INTERNATIONAL SEARCH REPORT

information on patent family members

Intern. Application No

PCT/GB 97/01225

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9217643 A	15-10-92	AU 651879 B AU 1431792 A BR 9205837 A CA 2108043 A EP 0578678 A GB 2254288 A,B JP 6509395 T	04-08-94 02-11-92 28-06-94 06-10-92 19-01-94 07-10-92 20-10-94
EP 37387 A	07-10-81	SE 429769 B AR 227183 A AT 5782 T AU 541771 B AU 6888281 A BR 8101963 A CA 1179591 A JP 1586727 C JP 2008077 B JP 57066193 A SE 8002483 A US 4446187 A	26-09-83 30-09-82 15-01-84 17-01-85 22-10-81 06-10-81 18-12-84 19-11-90 22-02-90 22-04-82 02-10-81 01-05-84
US 4427734 A	24-01-84	NONE	
DE 9416520 U	15-02-96	NONE	
US 3772746 A	20-11-73	US 3657068 A	18-04-72

